


COMBI SEALANT GUN

Pneumatic caulking gun for applying and spraying one-component adhesives and sealants.


Allows the application of all kinds of single-component sealants (in aluminium or plastic cartridges) in various finishes .

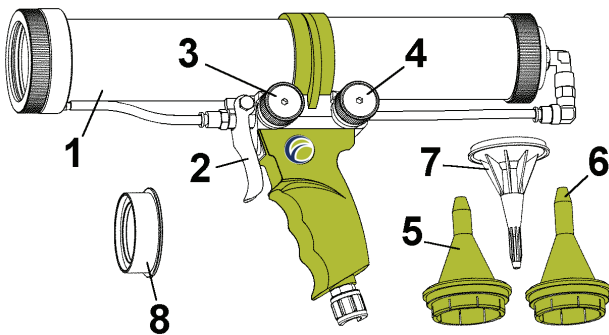


Scope of supply

1. Compressed air gun (max 8 bar)
2. Trigger
3. Pressure regulator
4. Pressure regulator
5. External nozzle for coarse structure (Volkswagen type) - CSG 02
6. External nozzle for fine structure (Renault type) - CSG 03
7. Internal nozzle for spray sealant applications - CSG 01
8. Adapter for non-sprayable sealants and adhesives.


Applying sprayable sealant

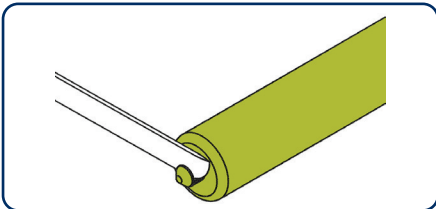

- 1 Open the cartridge

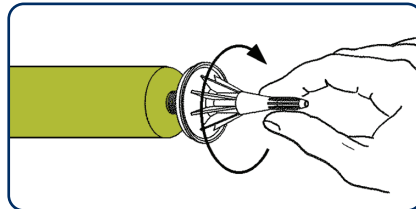

- 2 Screw the nozzle (7) onto the cartridges and fit it inside the gun after removing the front ring nut.

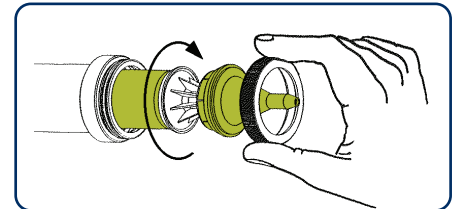

- 3 Put the external nozzle of your choice (5 or 6) on the gun and lock it in place.

- 4 Connect the compressed air at a pressure of about 6 bar and close both the pressure regulators (3 and 4), turning them in a clockwise direction.


- 5 Slightly open the front regulator (3).

- 6 Pull the trigger (2)


- 7 Now gently open the back regulator (4) and adjust the product supply

- 8 By adjusting the front regulator (3) and the spraying distance you can change the spraying pattern and the structure .


Applying non-sprayable sealant

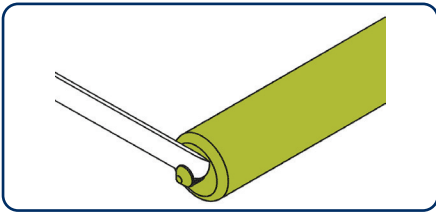

1 Open the cartridge.

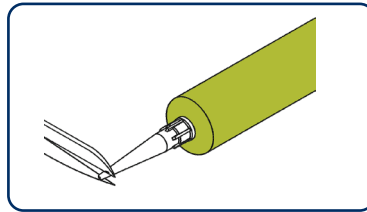

2 Cut the nozzle fitted on the cartridge to suit your requirements.

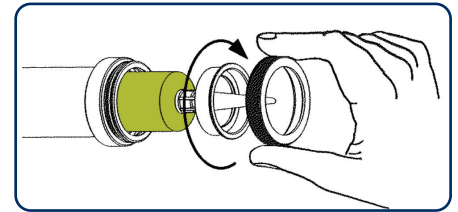

3 Put the adapter (8) onto the cartridge, insert the cartridge in the gun and tighten the ring-nut.

4 Connect the compressed air at a pressure of about 6 bar and close both the pressure regulators (3 and 4), turning them in a clockwise direction.

5 Pull the trigger (2)

6 Now gently open the back regulator (4) and adjust the product supply

SAFETY ADVICE

Never direct a jet of air at people or animals. Do not point this gun at any other person. Follow the instructions of the sealant – adhesive manufacturer. Wear appropriate P.P.E. Do not spray when other people are in the vicinity and do not allow children anywhere near your spraying equipment. Make sure the air pressure is no more than 10 bar (145 Psi). Do not spray in enclosed areas and maintain good ventilation.

Caution: Take the cartridge out of the gun after use even if it is not empty. Keep inner nozzle (pos. 7 - white colour) and outer nozzle (pos. 5-6 black colour) always clean. Before using the gun, ensure that cured sealant is not blocking the nozzle orifice. If necessary, clean with a thin steel pin. A blocking nozzle can cause a dangerous situation even if the gun is not connected to the compressed air.

Deze handleiding is ook beschikbaar in het Nederlands • kijk op www.finixa.com

Ce manuel est également disponible en français • consultez le site www.finixa.com

Diese Anleitung ist auch in deutscher Sprache erhältlich • besuchen Sie die Webseite www.finixa.com

Este manual está disponible también en el idioma español , favor acceder a www.finixa.com